

VP 36.5 XL110 - LED Vapor Proof

Alternative Products

Industrial LED Bulkhead Range


Star 12 XL110 AC
Star 12 XL110 DC

Star 24 XL110 AC
Star 24 XL110 DC

The **VP36.5 XL110** is an IP65 weatherproof and anti-corrosive luminaire ready for connection to a 230 volt 50Hz supply or a 110 volt 60Hz supply.

This LED light fitting has been manufactured from corrosion resistant glass reinforced polyester and contains a high impact diffuser with captive retention clips.

This LED light is suitable for illuminating multi-storey car parks, railways stations, tunnels, food preparation areas, cold stores and any moist or dusty environment.

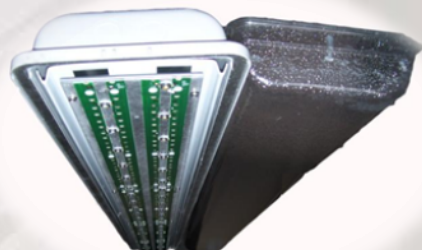

Specifications: VP 36.5 XL110 - LED Vapor Proof

	VP 36.5 XL110 AC
Product Code	VP5D-36-A001-C2
Power Consumption LED's	41.04 Watts
Power Consumption Driver	9 Watts
Total Power Consumption	50.04 Watts
Input Voltage	90 – 264Vac
Input Frequency	47 – 63Hz
Light Source	1.14 W High Power LED
LED QTY	36
Total LED Output	3960 lm
Operating Lumens at 25°c	3168 lm
LED Colour	Cool White
Colour Temp (K)	5400 - 6300 degrees K (Standard)
CRI	Ra>70
LED Lifespan	50,000 > 80,000 Hours
Operating Temperature	-30 degrees C to + 50 degrees C
Working Humidity	0 ~ 95%
Turn on time	100ns
Product Size (mm)	1576 x 100 x 116
Net Weight	3 Kg
Protection Rate	IP65
Certification	RoHS, CE
Warranty	3 Years

Gemma LIGHTING LIMITED

Unit 3 , Marshlands Spur
Farlington
Portsmouth
Hampshire
PO6 1RX

Tel: +44 (0) 844 856 5201
Fax: +44 (0) 844 856 5209

Email: info@gemmalighting.com

