

Earth 24 XL100 - LED Path Light

Alternative Products

Star - LED 2D Bulkhead Range

Star 16 XL100 AC
Star 16 XL100 DC

Star 24 XL100 AC
Star 24 XL100 DC

Sun - LED Flood Light

Sun 12 XL100 AC
Sun 12 XL100 DC

Sun 24 XL100 AC
Sun 24 XL100 DC

Sun 48 XL100 AC
Sun 48 XL100 DC

Sun 72 XL100 AC
Sun 72 XL100 DC


The **Earth 24 XL100 LED Path Light** is an environmentally friendly replacement for traditional Path Illumination.

This LED Path Light is ready for connection to either AC mains power supply or our Mercury solar power management unit, which provides a flexible lighting solution where mains power is not available or desired.

The Earth 24 XL100 is manufactured from strong pressure die-cast LM6M high corrosion resistance aluminium with a textured black full polyester powder finish.

The cover is 9mm thick (nominal) thermally shock resistant borosilicate glass.

These fittings are ideal for recreation area lighting, building lighting and car park lighting.

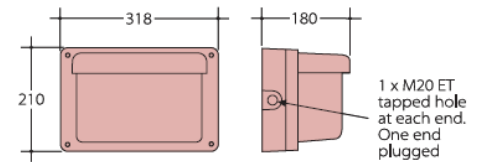

Fixing points: 4 x 7mm dia. concealed holes on 290 x 150mm centres

Specifications: Earth 24 XL100 – LED Path Light

| | AC | DC |
|---------------------------------|----------------------------------|------------|
| Product Code | SPL-4-2A-A | SPL-4-1D-A |
| Power Consumption | 28 Watts | 24 Watts |
| Input Voltage | 230V AC 50Hz / 110V AC 60Hz | 12 VDC |
| Light Source | 1W High Power LED | |
| LED QTY | 24 | |
| Total LED Output | 2400 lm | |
| Operating Lumens at 25°C | 1800 lm | |
| LED Colour | Cool White | |
| Colour Temp (K) | 5400 - 6300 degrees K (Standard) | |
| CRI | Ra>70 | |
| LED Lifespan | >50,000 Hours | |
| Operating Temperature | -30 degrees C to + 70 degrees C | |
| Working Humidity | 0 ~ 95% | |
| Turn on time | 100ns | |
| Product Size (mm) | 318mm x 210mm x 180mm | |
| Unit colour | Black | |
| Net Weight | 6.5Kg | |
| Mounting | Internal Mounting Holes | |
| Protection Rate | IP65 | |
| Certification | RoHS, CE | |
| Warranty | 3 Years | |

Gemma LIGHTING LIMITED

Unit 3, Marshlands Spur
Farlington
Portsmouth
Hampshire
PO6 1RX

Tel: +44 (0) 844 856 5201
Fax: +44 (0) 844 856 5209

Email: info@gemmalighting.com

