



The Jaguar 30W is a popular IP65 / IK08 rated LED Post Top with a modern and stylish feel.

Manufactured with a beautiful aluminium louvre stack and featuring a coated black/silver upper canopy to ensure a controlled distribution of light with minimal glare.

Note: Also available with a clear diffuser (See Dauntless range) or a translucent opal diffuser (see Albion range).

Options include Mini Photocell, Dali, Spill Shield and spigot size.



Jaguar 30W - LED Globe Post Top

Amenity Lighting

Features & Benefits


- LED rating 3,960lm (4K & 6K).
- LED rating 3,350lm (3K).
- Luminaire flux 3,445lm (4K & 6K).
- Luminaire flux 2,915lm (3K).
- Total wattage 30W.
- Warm White (3K), Neutral White (4K) and Cool White (6K) colour temperature options.
- -20 to +40°C operating temperature.
- IP65 / IK08 rated.
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell, Dali, 180° Spill Shield and spigot size.
- Manufactured from UV stabilised polycarbonate.
- Louvres for optimum performance and minimal upward light.
- Tamper proof fixings for increased vandal resistance.



Mini Photocell. To order, change xxxx-xxx-00x-xx to xxxx-xxx-04x-xx.



Silver canopy option. To order, change JGxx-xxx-00B-xx to JGxx-xxx-00S-xx.



180° Spill Shield. To be ordered separately, code = FIX 0190


Applications

-  Car Parks
-  Parks & Gardens
-  Retail Parks
-  Security
-  Walkways
-  Amenity Areas

Kelvin Options



Dimensions

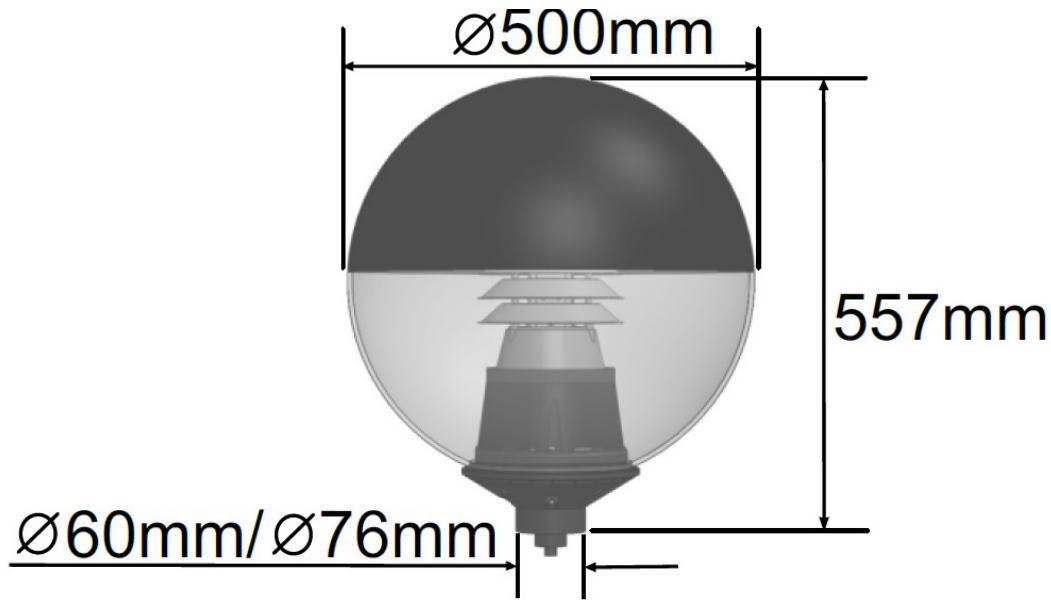

Specifications

Jaguar 30W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT(K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard - Black Top - 76mm Spigot													
JG30-A3C-00B-76	Jaguar-30W-LED-AC-6K-Std-Black-76mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3N-00B-76	Jaguar-30W-LED-AC-4K-Std-Black-76mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3W-00B-76	Jaguar-30W-LED-AC-3K-Std-Black-76mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	76
Standard - Black Top - 60mm Spigot													
JG30-A3C-00B-60	Jaguar-30W-LED-AC-6K-Std-Black-60mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3N-00B-60	Jaguar-30W-LED-AC-4K-Std-Black-60mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3W-00B-60	Jaguar-30W-LED-AC-3K-Std-Black-60mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	60
Standard - Black Top - Mini Photocell - 76mm Spigot													
JG30-A3C-04B-76	Jaguar-30W-LED-AC-6K-Std-M/Photocell-Black-76mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3N-04B-76	Jaguar-30W-LED-AC-4K-Std-M/Photocell-Black-76mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3W-00B-76	Jaguar-30W-LED-AC-3K-Std-M/Photocell-Black-76mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	76
Standard - Black Top - Mini Photocell - 60mm Spigot													
JG30-A3C-04B-60	Jaguar-30W-LED-AC-6K-Std-M/Photocell-Black-60mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3N-04B-60	Jaguar-30W-LED-AC-4K-Std-M/Photocell-Black-60mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3W-04B-60	Jaguar-30W-LED-AC-3K-Std-M/Photocell-Black-60mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	60

(table continued overleaf)

Specifications (Continued)

Jaguar 30W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Dali - Black Top - 76mm Spigot													
JG30-A3C-20B-76	Jaguar-30W-LED-AC-6K-Dali-Black-76mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3N-20B-76	Jaguar-30W-LED-AC-4K-Dali-Black-76mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	76
JG30-A3W-20B-76	Jaguar-30W-LED-AC-3K-Dali-Black-76mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	76
Dali - Black Top - 60mm Spigot													
JG30-A3C-20B-60	Jaguar-30W-LED-AC-6K-Dali-Black-60mm	LED	3,960	30	6K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3N-20B-60	Jaguar-30W-LED-AC-4K-Dali-Black-60mm	LED	3,960	30	4K	Ra>70	220-240	350	3,445	115	5	Black	60
JG30-A3W-20B-60	Jaguar-30W-LED-AC-3K-Dali-Black-60mm	LED	3,350	30	3K	Ra>80	220-240	350	2,915	97	5	Black	60

Legend: **Std** = Standard. **M/Photocell** = Mini Photocell.

3K = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options: **Silver Top** = Change 00B to 00S.

Photometric Data

To access our photometric data, visit: bit.ly/3BaSfio.



Gemma Lighting Ltd,
Unit 3, Marshlands Spur, Farlington,
Portsmouth, Hampshire, UK, PO6 1RX.

www.gemmalighting.com
+44 (0) 2392 315 911

Need a Lighting Design?

We offer a free of charge design service, contact our team today:
studio@gemmalighting.com.

Disclaimer: Information correct at the time of publication; V220912.