




The Victory 22W is an IP65 rated weatherproof and anti-corrosive luminaire, 4ft (1312mm) in length.

Manufactured from corrosion resistant glass reinforced polyester and containing a high impact diffuser with captive retention clips.

Options include Dali, Microwave Sensor and Emergency.

Victory 22W - LED Weatherproof

Industrial Lighting

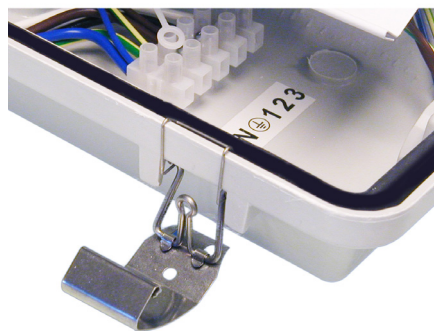


Features

- LED rating 3,000lm.
- Luminaire flux 2,530lm.
- Total wattage 22W.
- 4000K color temperature - neutral white.
- Protection degree IP65.
- -20 to +40°C operating temperature (Emergency 0 to +40°C).
- LED life span > 65,000hrs.
- Philips LEDs and Philips Driver.
- Dali and Wieland Connector Options.
- High impact diffuser with captive retention clips.

Applications

- Cold Stores
- Industrial Plant
- Factories
- Underground Car Parks
- Freezer Centres

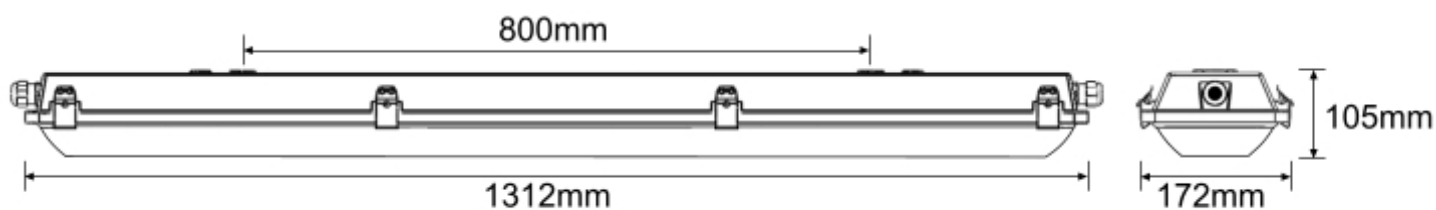

Specifications

Victory 22W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Length (mm)	Width (mm)	Height (mm)	Lf
Standard																
VP22-A1N-400G	Victory-22W-LED-AC-4K-4FT-Std-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-400G-W	Victory-22W-LED-AC-4K-4FT-Std-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Standard - Emergency																
VP22-A1N-401G	Victory-22W-LED-AC-4K-4FT-Std-E3-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-401G-W	Victory-22W-LED-AC-4K-4FT-Std-E3-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Standard - Microwave																
VP22-A1N-402G	Victory-22W-LED-AC-4K-4FT-Std-MW-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-402G-W	Victory-22W-LED-AC-4K-4FT-Std-MW-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Standard - Microwave - Emergency																
VP22-A1N-403G	Victory-22W-LED-AC-4K-4FT-Std-MW- E3- Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-403G-W	Victory-22W-LED-AC-4K-4FT-Std-MW- E3- Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Dali																
VP22-A1N-420G	Victory-22W-LED-AC-4K-4FT-Dali-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-420G-W	Victory-22W-LED-AC-4K-4FT-Dali-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Dali - Emergency																
VP22-A1N-421G	Victory-22W-LED-AC-4K-4FT-Dali-E3-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-421G-W	Victory-22W-LED-AC-4K-4FT-Dali-E3-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800

Specifications

Victory 22W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Length (mm)	Width (mm)	Height (mm)	Lf
Dali - Microwave																
VP22-A1N-422G	Victory-22W-LED-AC-4K-4FT-Dali-MW-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-422G-W	Victory-22W-LED-AC-4K-4FT-Dali-MW-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
Dali - Microwave - Emergency																
VP22-A1N-423G	Victory-22W-LED-AC-4K-4FT-Dali-MW-E3-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP22-A1N-423G-W	Victory-22W-LED-AC-4K-4FT-Dali-MW-E3-Wieland Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800

Legend: **Std** = Standard. **4K** = Neutral White (4000K). **NW** = Neutral White.