



The Victory 4ft (1312mm) is an IP65 rated weatherproof and anti-corrosive luminaire, available in 22W and 51W.

Manufactured from corrosion resistant glass reinforced polyester and containing a high impact diffuser with captive retention clips.

Options include PIR and Emergency.

Victory 4ft - LED Weatherproof

Industrial LED Lighting




Features

- LED rating 3,000lm - 7,000lm.
- Luminaire flux 2,530lm - 6,110lm.
- Total wattage 22W - 51W.
- 4000K color temperature - neutral white.
- Protection degree IP65.
- -20 to +40°C operating temperature (Emergency -10 to +40°C).
- LED life span > 65,000hrs.
- Philips LEDs and Philips Driver.
- High impact diffuser with captive retention clips.

Applications

- Underground Car Parks
- Cold Stores
- Freezer Centres
- Factories
- Industrial Plant

www.gemmalighting.com
0800 999 5201

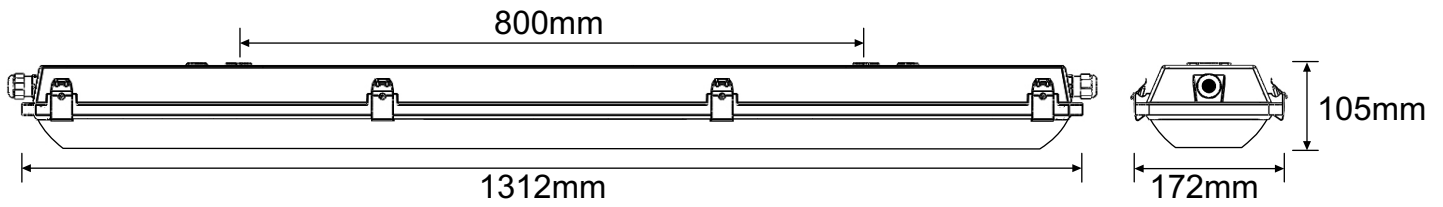

Specifications

Victory 22W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage	Drive Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Length (mm)	Width (mm)	Height (mm)	Lf
Standard																
VP22-A1N-400G	Victory-22W-LED-AC-4K-4FT-Std-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP51-A3N-400G	Victory-51W-LED-AC-4K-4FT-Std-Cable Gland	LED	7,000	51	NW	4K	Ra>70	200-240	385	6,110	120	3.7	1312	172	105	800
Standard - Emergency																
VP22-A1N-401G	Victory-22W-LED-AC-4K-4FT-Std-E3-Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP51-A3N-401G	Victory-51W-LED-AC-4K-4FT-Std-E3-Cable Gland	LED	7,000	51	NW	4K	Ra>70	200-240	385	6,110	120	3.7	1312	172	105	800
1-10V																
VP22-A1N-440G	Victory - 22W - LED - AC - 4K - 4FT - 1-10V - Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP51-A3N-440G	Victory - 51W - LED - AC - 4K - 4FT - 1-10V - Cable Gland	LED	7,000	51	NW	4K	Ra>70	200-240	385	6,110	120	3.7	1312	172	105	800
1-10V - Emergency																
VP22-A1N-441G	Victory - 22W - LED - AC - 4K - 4FT - 1-10V - E3 - Cable Gland	LED	3,000	22	NW	4K	Ra>70	200-240	158	2,530	115	3.7	1312	172	105	800
VP51-A3N-441G	Victory - 51W - LED - AC - 4K - 4FT - 1-10V - E3 - Cable Gland	LED	7,000	51	NW	4K	Ra>70	200-240	385	6,110	120	3.7	1312	172	105	800
Batten PIR Options:																
LIT-0072	ON/OFF Batten mount PIR presence detector - IP65															
LIT-0057	1-10V Dimming Batten mount PIR presence detector - IP65 (Note: 1-10V Light required)															
LIT-0050	Programming IR handset for Batten PIR															
LIT-0073	Professional, programming/commissioning LCD handset for Batten PIR															

Legend: **Std** = Standard. **E3** = 3Hr Emergency. **4K** = Neutral White (4000K)