



The Victory 5ft (1612mm) is an IP65 rated weatherproof and anti-corrosive luminaire, available in 32W and 64W.

Manufactured from corrosion resistant glass reinforced polyester and containing a high impact diffuser with captive retention clips.

Options include PIR and Emergency.

Victory 5ft - LED Weatherproof

Industrial Lighting



Batten PIR Option




Features

- LED rating 4,000lm - 8,500lm.
- Luminaire flux 3,650m - 7,550lm.
- Total wattage 32W -64W.
- 4000K colour temperature - neutral white.
- Protection degree IP65.
- -20 to +40°C operating temperature (Emergency -10 to +40°C).
- LED Life span > 65,000hrs.
- Philips LEDs and Philips Driver.
- High impact diffuser with captive retention clips.

Applications

- Cold Stores
- Industrial Plant
- Factories
- Underground Car Parks
- Freezer Centres

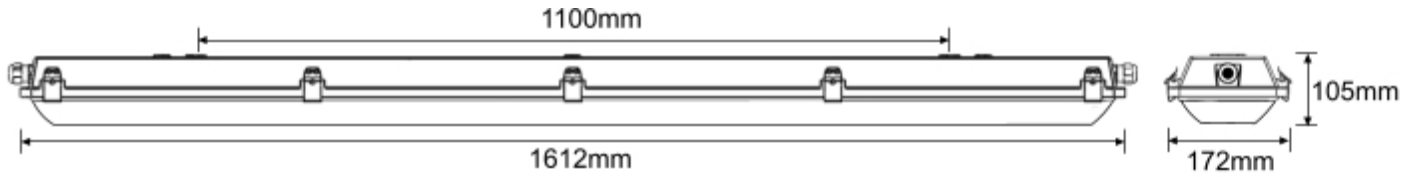

Victory 5ft

Specifications

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Length (mm)	Width (mm)	Height (mm)	Lf
Standard																
VP32-A1N-500G	Victory-32W-LED-AC-4K-5FT-Std-Cable Gland	LED	4,000	32	NW	4K	Ra>70	200-240	187	3,650	114	4.4	1612	172	105	1100
VP64-A3N-500G	Victory-64W-LED-AC-4K-5FT-Std-Cable Gland	LED	8,500	64	NW	4K	Ra>70	200-240	385	7,550	118	4.4	1612	172	105	1100
Standard - Emergency																
VP32-A1N-501G	Victory-32W-LED-AC-4K-5FT-Std-E3-Cable Gland	LED	4,000	32	NW	4K	Ra>70	200-240	187	3,650	114	4.4	1612	172	105	1100
VP64-A3N-501G	Victory-64W-LED-AC-4K-5FT-Std-E3-Cable Gland	LED	8,500	64	NW	4K	Ra>70	200-240	385	7,550	118	4.4	1612	172	105	1100
1-10V																
VP32-A1N-540G	Victory - 32W - LED - AC - 4K - 5FT - 1-10V - Cable Gland	LED	4,000	32	NW	4K	Ra>70	200-240	187	3,650	114	4.4	1612	172	105	1100
VP64-A3N-540G	Victory - 64W - LED - AC - 4K - 5FT - 1-10V - Cable Gland	LED	8,500	64	NW	4K	Ra>70	200-240	385	7,550	118	4.4	1612	172	105	1100
1-10V - Emergency																
VP32-A1N-541G	Victory - 32W - LED - AC - 4K - 5FT - 1-10V - E3 - Cable Gland	LED	4,000	32	NW	4K	Ra>70	200-240	187	3,650	114	4.4	1612	172	105	1100
VP64-A3N-541G	Victory - 64W - LED - AC - 4K - 5FT - 1-10V - E3 - Cable Gland	LED	8,500	64	NW	4K	Ra>70	200-240	385	7,550	118	4.4	1612	172	105	1100
Batten PIR Options:																
LIT-0072	ON/OFF Batten mount PIR presence detector - IP65															
LIT-0057	1-10V Dimming Batten mount PIR presence detector - IP65 (Note: 1-10V Light required)															
LIT-0050	Programming IR handset for Batten PIR															
LIT-0073	Professional, programming/commissioning LCD handset for Batten PIR															

Legend: **Std** = Standard. **E3** = 3Hr Emergency. **4K** = Neutral White (4000K)