



The Farlington 40W is a high performance IP65 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured from aluminium die-cast housing, stainless steel fixings and featuring a high impact glass cover for additional protection.

Options include Nema socket, LED colour temperature, housing colour and spigot size.

Farlington 40W - LED Street Light

Street Lighting




Features

- LED rating 5,688lm (4000K & 6000K)
- LED rating 4,807lm (3000K)
- Luminaire flux 5,005lm (4000K & 6000K)
- Luminaire flux 4,230lm (3000K)
- Total wattage 40W
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 34/60/76mm spigot options.
- Aluminium die-casting housing for maximum heat dissipation
- Optimised optics for high uniformity and maximum spacing's between columns.

Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

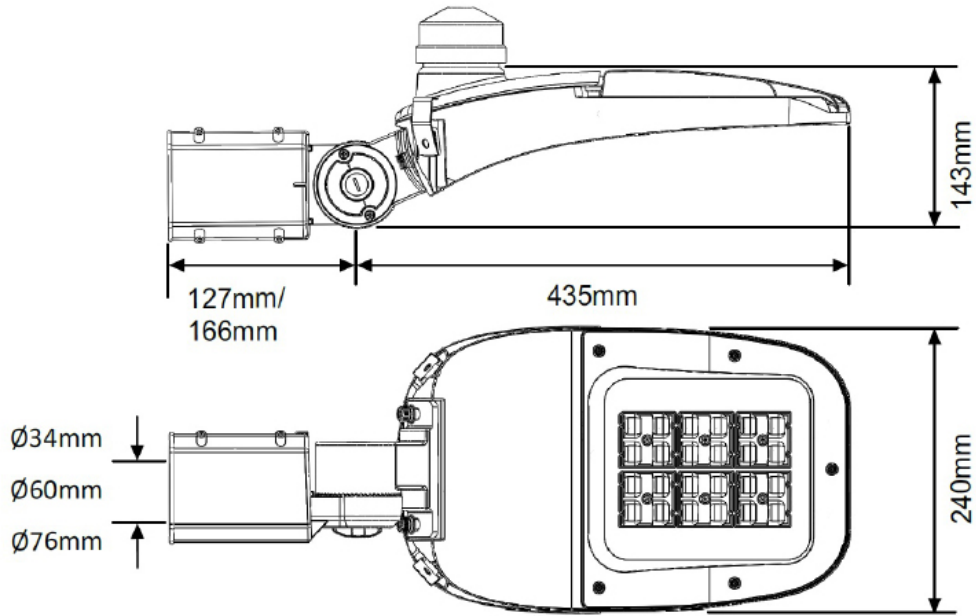

Specifications

Farlington 40W

| Item Number | Description | Light Source | LED Rating (lm) | Total Wattage(W) | Colour Name | CCT (K) | CRI | Voltage | Drive Current | Luminaire Flux (lm) | Luminaire Efficacy (lm/W) | Kg | Unit Colour | Spigot Size (mm) | |
|------------------------------------|--|--------------|-----------------|------------------|-------------|---------|-------|---------|---------------|---------------------|---------------------------|-----|-------------|------------------|--|
| Standard - 6K | | | | | | | | | | | | | | | |
| F40-A4C-00G-34 | Farlington-40W-LED-AC-6K-Std-Grey-34mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 34 | |
| F40-A4C-00G-60 | Farlington-40W-LED-AC-6K-Std-Grey-60mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 60 | |
| F40-A4C-00G-76 | Farlington-40W-LED-AC-6K-Std-Grey-76mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 76 | |
| Standard - 4K | | | | | | | | | | | | | | | |
| F40-A4N-00G-34 | Farlington-40W-LED-AC-4K-Std-Grey-34mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 34 | |
| F40-A4N-00G-60 | Farlington-40W-LED-AC-4K-Std-Grey-60mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 60 | |
| F40-A4N-00G-76 | Farlington-40W-LED-AC-4K-Std-Grey-76mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 76 | |
| Standard - 3K | | | | | | | | | | | | | | | |
| F40-A4W-00G-34 | Farlington-40W-LED-AC-3K-Std-Grey-34mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 34 | |
| F40-A4W-00G-60 | Farlington-40W-LED-AC-3K-Std-Grey-60mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 60 | |
| F40-A4W-00G-76 | Farlington-40W-LED-AC-3K-Std-Grey-76mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 76 | |
| Standard - Nema Socket - 6K | | | | | | | | | | | | | | | |
| F40-A4C-05G-34 | Farlington-40W-LED-AC-6K-Std-Nema Socket-Grey-34mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 34 | |
| F40-A4C-05G-60 | Farlington-40W-LED-AC-6K-Std-Nema Socket-Grey-60mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 60 | |
| F40-A4C-05G-76 | Farlington-40W-LED-AC-6K-Std-Nema Socket-Grey-76mm | LED | 5,688 | 40 | CW | 6K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 76 | |
| Standard - Nema Socket - 4K | | | | | | | | | | | | | | | |
| F40-A4N-05G-34 | Farlington-40W-LED-AC-4K-Std-Nema Socket-Grey-34mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 34 | |
| F40-A4N-05G-60 | Farlington-40W-LED-AC-4K-Std-Nema Socket-Grey-60mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 60 | |
| F40-A4N-05G-76 | Farlington-40W-LED-AC-4K-Std-Nema Socket-Grey-76mm | LED | 5,688 | 40 | NW | 4K | Ra>70 | 220-240 | 495 | 5,005 | 125 | 6.0 | Grey | 76 | |

Specifications

Farlington 40W

| Item Number | Description | Light Source | LED Rating (lm) | Total Wattage (W) | Colour Name | CCT (K) | CRI | Voltage (VAC) | Drive Current | Luminaire Flux (lm) | Luminaire Efficacy (lm/W) | KG | Unit Colour | Spigot Size (mm) | |
|------------------------------------|--|--------------|-----------------|-------------------|-------------|---------|-------|---------------|---------------|---------------------|---------------------------|-----|-------------|------------------|--|
| Standard - Nema Socket - 3K | | | | | | | | | | | | | | | |
| F40-A4W-05G-34 | Farlington-40W-LED-AC-3K-Std-Nema Socket-Grey-34mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 34 | |
| F40-A4W-05G-60 | Farlington-40W-LED-AC-3K-Std-Nema Socket-Grey-60mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 60 | |
| F40-A4W-05G-76 | Farlington-40W-LED-AC-3K-Std-Nema Socket-Grey-76mm | LED | 4,807 | 40 | WW | 3K | Ra>80 | 220-240 | 495 | 4,230 | 106 | 6.0 | Grey | 76 | |

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options:

Grey (RAL 7037) Housing - Standard.

Black (RAL 9005) Housing - Change 'ooG' to 'ooB'