



The Farlington 60W is a high performance IP65 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured from aluminium die-cast housing, stainless steel fixings and featuring a high impact glass cover for additional protection.

Options include Nema socket, LED colour temperature, housing colour and spigot size.

## Farlington 60W - LED Street Light

### Street Lighting




### Features

- LED rating 8,832lm (4000K & 6000K)
- LED rating 7,472lm (3000K)
- Luminaire flux 7,905lm (4000K & 6000K)
- Luminaire flux 6,687lm (3000K)
- Total wattage 60W
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 34/60/76mm spigot options.
- Aluminium die-casting housing for maximum heat dissipation
- Optimised optics for high uniformity and maximum spacing's between columns.

### Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

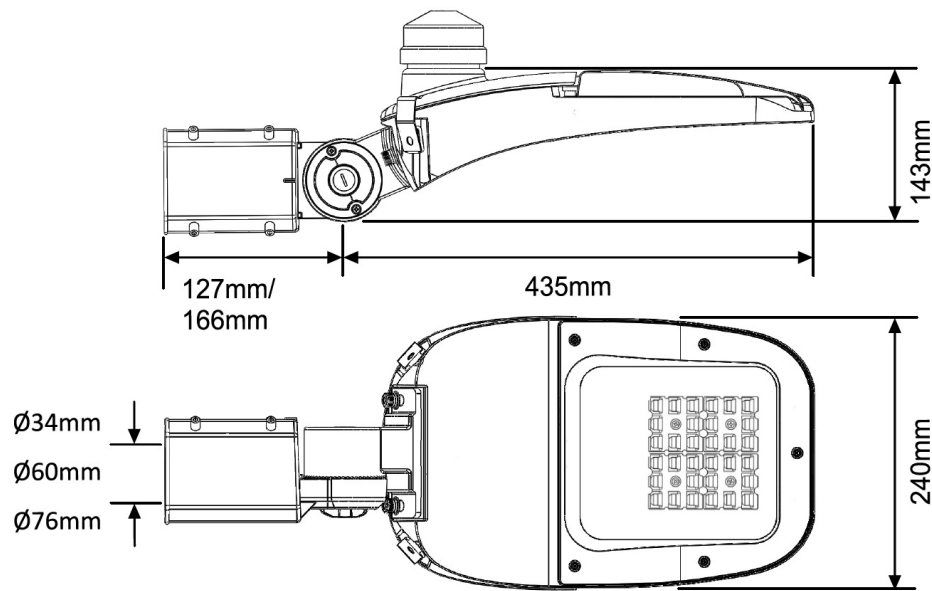

## Specifications

### Farlington 60W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour (RAL)	Spigot Size (mm)	
<b>Standard - 6K</b>															
F60-A6C-00G-34	Farlington-60W-LED-AC-6K-Std-Grey-34mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	34	
F60-A6C-00G-60	Farlington-60W-LED-AC-6K-Std-Grey-60mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	60	
F60-A6C-00G-76	Farlington-60W-LED-AC-6K-Std-Grey-76mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	76	
<b>Standard - 4K</b>															
F60-A6N-00G-34	Farlington-60W-LED-AC-4K-Std-Grey-34mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	34	
F60-A6N-00G-60	Farlington-60W-LED-AC-4K-Std-Grey-60mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	60	
F60-A6N-00G-76	Farlington-60W-LED-AC-4K-Std-Grey-76mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	76	
<b>Standard - 3K</b>															
F60-A6W-00G-34	Farlington-60W-LED-AC-3K-Std-Grey-34mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	34	
F60-A6W-00G-60	Farlington-60W-LED-AC-3K-Std-Grey-60mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	60	
F60-A6W-00G-76	Farlington-60W-LED-AC-3K-Std-Grey-76mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	76	
<b>Standard - Nema Socket - 6K</b>															
F60-A6C-05G-34	Farlington-60W-LED-AC-6K-Std-Nema Socket-Grey-34mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	34	
F60-A6C-05G-60	Farlington-60W-LED-AC-6K-Std-Nema Socket-Grey-60mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	60	
F60-A6C-05G-76	Farlington-60W-LED-AC-6K-Std-Nema Socket-Grey-76mm	LED	8,832	60	CW	6K	Ra>70	220-240	600	7,905	132	6.0	Grey	76	
<b>Standard - Nema Socket - 4K</b>															
F60-A6N-05G-34	Farlington-60W-LED-AC-4K-Std-Nema Socket-Grey-34mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	34	
F60-A6N-05G-60	Farlington-60W-LED-AC-4K-Std-Nema Socket-Grey-60mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	60	
F60-A6N-05G-76	Farlington-60W-LED-AC-4K-Std-Nema Socket-Grey-76mm	LED	8,832	60	NW	4K	Ra>70	220-240	600	7,905	132	6.0	Grey	76	

# Specifications

## Farlington 60W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
<b>Standard - Nema Socket - 3K</b>														
F60-A6W-05G-34	Farlington-60W-LED-AC-3K-Std-Nema Socket-Grey-34mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	34
F60-A6W-05G-60	Farlington-60W-LED-AC-3K-Std-Nema Socket-Grey-60mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	60
F60-A6W-05G-76	Farlington-60W-LED-AC-3K-Std-Nema Socket-Grey-76mm	LED	7,472	60	WW	3K	Ra>80	220-240	600	6,687	111	6.0	Grey	76

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options:

**Grey (RAL 7037) Housing** - Standard.

**Black (RAL 9005) Housing** - Change '00G' to '00B'