



The Farlington 15W is a high performance IP65 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured from aluminium die-cast housing, stainless steel fixings and featuring a high impact glass cover for additional protection.

Options include Nema socket, LED colour temperature, housing colour and spigot size.

Farlington 15W - LED Street Light

Street Lighting




Features

- LED rating 1,984lm (4000K & 6000K)
- LED rating 1,664lm (3000K)
- Luminaire flux 1,746m (4000K & 6000K)
- Luminaire flux 1,464lm (3000K)
- Total wattage 15W
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 34/60/76mm spigot options.
- Aluminium die-casting housing for maximum heat dissipation
- Optimised optics for high uniformity and maximum spacing's between columns.

Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

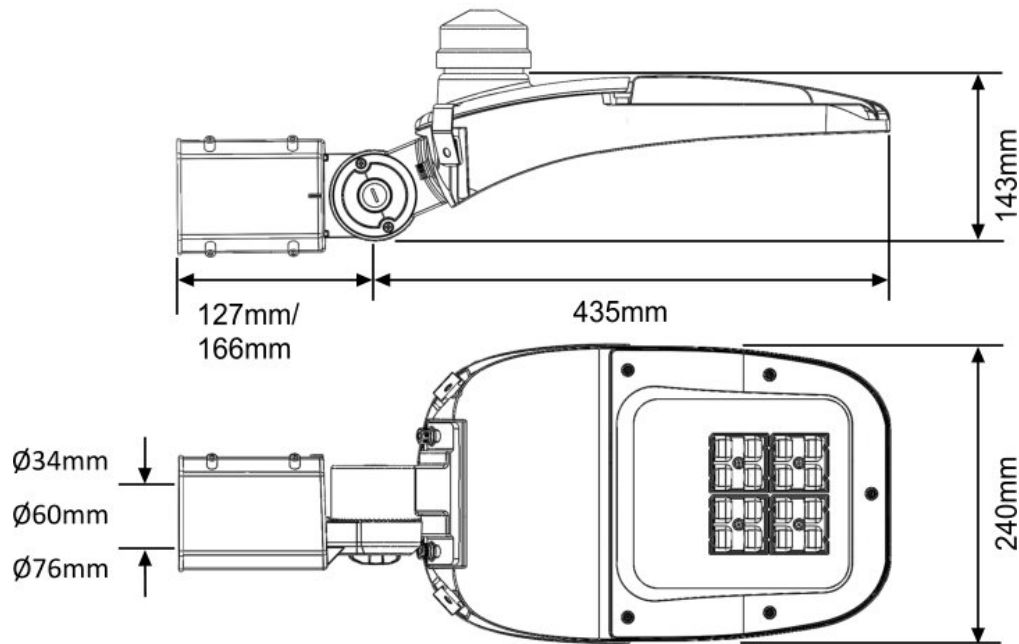

Specifications

Farlington 15W

| Item Number | Description | Light Source | LED Rating (lm) | Total Wattage(W) | Colour Name | CCT (K) | CRI | Voltage | Drive Current | Luminaire Flux (lm) | Luminaire Efficacy (lm/W) | Kg | Unit Colour | Spigot Size (mm) | |
|------------------------------------|--|--------------|-----------------|------------------|-------------|---------|-------|---------|---------------|---------------------|---------------------------|-----|-------------|------------------|--|
| Standard - 6K | | | | | | | | | | | | | | | |
| F15-A2C-00G-34 | Farlington-15W-LED-AC-6K-Std-Grey-34mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 34 | |
| F15-A2C-00G-60 | Farlington-15W-LED-AC-6K-Std-Grey-60mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 60 | |
| F15-A2C-00G-76 | Farlington-15W-LED-AC-6K-Std-Grey-76mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 76 | |
| Standard - 4K | | | | | | | | | | | | | | | |
| F15-A2N-00G-34 | Farlington-15W-LED-AC-4K-Std-Grey-34mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 34 | |
| F15-A2N-00G-60 | Farlington-15W-LED-AC-4K-Std-Grey-60mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 60 | |
| F15-A2N-00G-76 | Farlington-15W-LED-AC-4K-Std-Grey-76mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 76 | |
| Standard - 3K | | | | | | | | | | | | | | | |
| F15-A2W-00G-34 | Farlington-15W-LED-AC-3K-Std-Grey-34mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 34 | |
| F15-A2W-00G-60 | Farlington-15W-LED-AC-3K-Std-Grey-60mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 60 | |
| F15-A2W-00G-76 | Farlington-15W-LED-AC-3K-Std-Grey-76mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 76 | |
| Standard - Nema Socket - 6K | | | | | | | | | | | | | | | |
| F15-A2C-05G-34 | Farlington-15W-LED-AC-6K-Std-Nema Socket-Grey-34mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 34 | |
| F15-A2C-05G-60 | Farlington-15W-LED-AC-6K-Std-Nema Socket-Grey-60mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 60 | |
| F15-A2C-05G-76 | Farlington-15W-LED-AC-6K-Std-Nema Socket-Grey-76mm | LED | 1,984 | 15 | CW | 6K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 76 | |
| Standard - Nema Socket - 4K | | | | | | | | | | | | | | | |
| F15-A2N-05G-34 | Farlington-15W-LED-AC-4K-Std-Nema Socket-Grey-34mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 34 | |
| F15-A2N-05G-60 | Farlington-15W-LED-AC-4K-Std-Nema Socket-Grey-60mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 60 | |
| F15-A2N-05G-76 | Farlington-15W-LED-AC-4K-Std-Nema Socket-Grey-76mm | LED | 1,984 | 15 | NW | 4K | Ra>70 | 220-240 | 245 | 1,746 | 116 | 6.0 | Grey | 76 | |

Specifications

Farlington 15W

| Item Number | Description | Light Source | LED Rating (lm) | Total Wattage (W) | Colour Name | CCT (K) | CRI | Voltage (VAC) | Drive Current | Luminaire Flux (lm) | Luminaire Efficacy (lm/W) | KG | Unit Colour | Spigot Size (mm) |
|------------------------------------|--|--------------|-----------------|-------------------|-------------|---------|-------|---------------|---------------|---------------------|---------------------------|-----|-------------|------------------|
| Standard - Nema Socket - 3K | | | | | | | | | | | | | | |
| F15-A2W-05G-34 | Farlington-15W-LED-AC-3K-Std-Nema Socket-Grey-34mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 34 |
| F15-A2W-05G-60 | Farlington-15W-LED-AC-3K-Std-Nema Socket-Grey-60mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 60 |
| F15-A2W-05G-76 | Farlington-15W-LED-AC-3K-Std-Nema Socket-Grey-76mm | LED | 1,664 | 15 | WW | 3K | Ra>80 | 220-240 | 245 | 1,464 | 98 | 6.0 | Grey | 76 |

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options:

Grey (RAL 7037) Housing - Standard.

Black (RAL 9005) Housing - Change 'ooG' to 'ooB'